
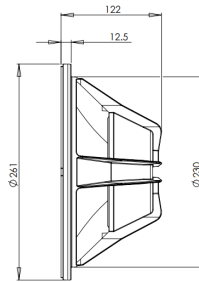


# 10HPL64



**8Ω****LF Drivers - 10.0 Inches**

- 400 W continuous program power capacity
- 64 mm (2.5 in) aluminium voice coil
- 60 - 4000 Hz response
- 98.5 dB sensitivity
- Neodymium magnet allows a very light yet powerful motor assembly

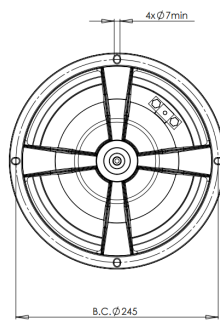

# 10HPL64

LF Drivers- 10.0 Inches

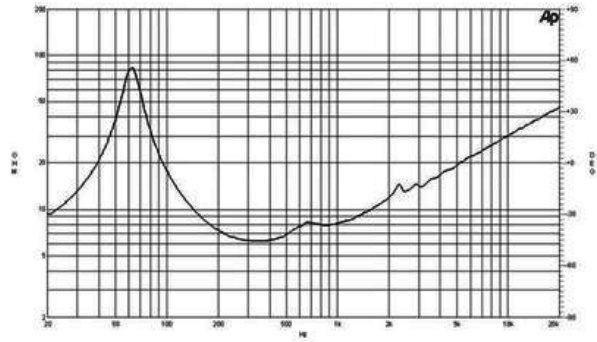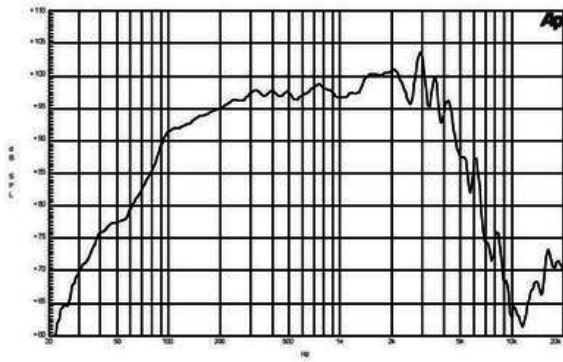

## SPECIFICATIONS

|  |                   |
|--|-------------------|
| Nominal Diameter                       | 250 mm (10.0 in)  |
| Nominal Impedance                      | 8 Ω               |
| Minimum Impedance                      | 6.2 Ω             |
| Nominal Power Handling <sup>1</sup>    | 200 W             |
| Continuous Power Handling <sup>2</sup> | 400 W             |
| Sensitivity <sup>3</sup>               | 98.5 dB           |
| Frequency Range                        | 60 - 4000 Hz      |
| Voice Coil Diameter                    | 64 mm (2.5 in)    |
| Winding Material                       | Aluminium         |
| Former Material                        | Glass Fibre       |
| Winding Depth                          | 12.0 mm (0.47 in) |
| Magnetic Gap Depth                     | 8.0 mm (0.31 in)  |
| Flux Density                           | 1.25 T            |

## DESIGN

|                       |  |
|-----------------------|--|
| Surround Shape        | Double Roll                                  |
| Cone Shape            | Exponential                                  |
| Magnet Material       | Neodymium Inside Slug                        |
| Spider                | Single                                       |
| Pole Design           | Straight Pole                                |
| Woofer Cone Treatment | None   |
| Recommended Enclosure | 26.0 dm <sup>3</sup> (0.92 ft <sup>3</sup> ) |
| Recommended Tuning    | 67 Hz  |

## PARAMETERS<sup>4</sup>

|                     |   |
|---------------------|---|
| Resonance Frequency | 61 Hz   |
| Re                  | 5.4 Ω   |
| Qes                 | 0.33  |
| Qms                 | 4.5   |
| Qts                 | 0.31  |
| Vas                 | 32.0 dm <sup>3</sup> (1.1 ft <sup>3</sup> )   |
| Sd                  | 320.0 cm <sup>2</sup> (50.0 in <sup>2</sup> ) |
| η <sub>o</sub>      | 2.5 %   |
| X <sub>max</sub>    | 4.0 mm  |
| X <sub>var</sub>    | 5.5 mm  |
| M <sub>ms</sub>     | 29.0 g  |
| Bl                  | 15.0 Txm                                      |
| Le                  | 0.5 mH  |
| EBP                 | 184 Hz  |

## MOUNTING AND SHIPPING INFO

|                               |   |
|-------------------------------|---|
| Overall Diameter              | 261 mm (10.3 in)                            |
| Bolt Circle Diameter          | 245 mm (9.6 in)                             |
| Baffle Cutout Diameter        | 230.0 mm (8.8 in)                           |
| Depth                         | 122 mm (4.8 in)                             |
| Flange and Gasket Thickness   | 13 mm (0.5 in)                              |
| Air Volume Occupied by Driver | 1.5 dm <sup>3</sup> (0.05 ft <sup>3</sup> ) |
| Net Weight                    | 2.0 kg (4.4 lb)                             |
| Shipping Units                | 1   |
| Shipping Weight               | 2.6 kg (5.7 lb)                             |
| Shipping Box                  | 295x314x175 mm (11.61x12.36x6.89 in)        |

## SERVICE KIT

RCK010HPL648

1. 2 hours test made with continuous pink noise signal within the range Fs-10Fs. Power calculated on rated nominal impedance. Loudspeaker in free air.
2. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
3. Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.
4. Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.

**B&C Speakers s.p.a.**

Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) - ITALY - Tel. +39 055 65721 - Fax +39 055 6572312 - mail@bcspeakers.com