

Technical Specifications

Version 1.2 July 2000





MEASUREMENT MICROPHONE

FEATURES

- ▲ Precise electret condenser measurement microphone
- ▲ Ultra-linear frequency response
- ▲ Well-balanced, true omni-directional pattern
- ▲ Optimally suited for room correction applications
- ▲ Phantom powered, +15 V to +48 V
- ▲ Rugged construction and sleek, modern design
- ▲ Microphone stand adapter and windscreen for outdoor measurement included
- ▲ Perfect for use with the ULTRA-CURVE DSP8000 / ULTRA-CURVE PRO DSP8024 or any other real-time analyzer
- ▲ Manufactured under the BEHRINGER quality control

SPECIFICATIONS

Type	electret condenser, omni-directional
Impedance	600 Ohms
Sensitivity	-60 dB
Frequency response	15 Hz to 20 kHz
Connector	gold-plated XLR
Phantom power	+15 V to +48 V
Weight	app. 120 g

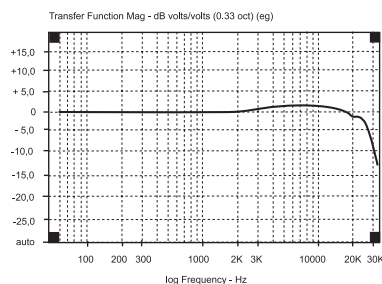

BEHRINGER is constantly striving to maintain the highest professional standards. As a result of these efforts, modifications may be made from time to time to existing products without prior notice. Specifications and appearance may differ from those listed or illustrated.

