


220 W continuous program power capacity
 1.4" horn throat diameter
 75 mm (3 in) aluminium voice coil
 Titanium diaphragm
 500 - 18000 Hz response
 108.5 dB sensitivity
 Neodymium magnet assembly with shorting copper cap

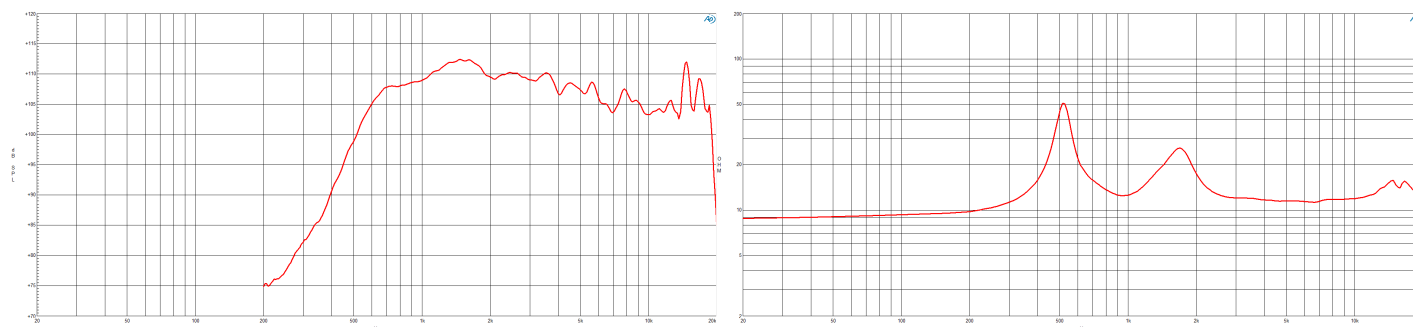

SPECIFICATIONS

Driver mounted on B&C ME90 horn.

Throat Diameter	36 mm (1.4 in)
Nominal Impedance	16 Ω
Minimum Impedance	11.3 Ω
Nominal Power Handling	110 W 2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.
Continuous Power Handling	220 W Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
Sensitivity	108.5 dB Applied RMS Voltage is set to 4V for 16 ohms Nominal Impedance.
Frequency Range	0.5 kHz - 18 kHz
Recommended Crossover	1.2 kHz 12 dB/oct. or higher slope high-pass filter.
Voice Coil Diameter	75 mm (3 in)
Winding Material	Aluminium
Inductance	0.12 mH
Diaphragm Material	Titanium
Flux Density	2.05 T
Max Frequency Range	18 kHz
Min Frequency Range	0.5 kHz

SERVICE KITS

HF replacement-diaphragm	MMD3BTN16M
--------------------------	------------

MOUNTING AND SHIPPING INFO

Four M6 holes 90° on 102 mm (4 in) diameter

Other details	4x M6 Mounting Studs with bolts and washers included
Overall Diameter	131 mm (5.2 in)
Depth	53 mm (2.09 in)
Net Weight	2.4 kg (5.29 lb)
Shipping Units	1 pcs
Shipping Weight	2.45 kg (5.39 lb)
Shipping Box	140x135x62 mm (5.51x5.31x2.44 in)