# ME 36

## hypercardioid installed sound microphone

#### **FEATURES**

- Highly directional mini shotgun microphone
- Low noise and large transponse range
- Thin and elegant for unobtrusive miking
- Interference tube rotates for optimum alignment
- Gold plated contact points for Maintenance-free long term operation
- Large range of high quality goosenecks and mounting options

#### **The ME 36** is a permanently polarized condenser microphone capsule for use with Sennheiser MZH goosenecks. This mini shotgun microphone features a hypercardioid / lobar directivity for an outstanding background noise rejection. In combination with the 15cm short gooseneck MZH 3015 it facilitates inconspicous placement. The ME 36 is suitable for a very wide range of applications including: conference, public address, studio, broadcast, video and others.

## TECHNICAL DATA


Transducer principle	pre-polarised condenser microphone
Acoustics	I
Frequency response	40Hz - 20 kHz
Impedance	
Minimal terminating impedance	
Maximum sound pressure level	130 dB SPL
Equivalent noise level	23 dBA
Equivalent noise level	
weighted as per CCIR 468-3	34 dB
Phantom powering	P12 - P48 V
Current consumption	250 µA
Weight	
Dimensions	ø 8,2 x L96 mm (ø 0.33'' x 3,78'')
Coating	matte black
Delivery includes	
	MZW 36 windshield

### ARCHITECT'S SPECIFICATIONS

A mini shotgun microphone for speech transmission shall be unobtrusive in appearance. The microphone provides a hypercardioid/lobar directivity and shall be powered with 12 to 48V phantom powering. The microphone shall cover a frequency range of 40Hz to 20kHz, the equivalent noise level must not exceed 23 dB weighted A. For connection with Sennheiser MZH goosenecks a high quality screw thread shall be provided. The electrical contact points shall be gold plated. The housing of the microphone shall be made from metal, finished with a non reflective black coating. Various mounting options and goosenecks shall be available. The microphone shall be Sennheiser ME 36.

🚺 SENNHEISER

## ME 36 hypercardioid installed sound microphone

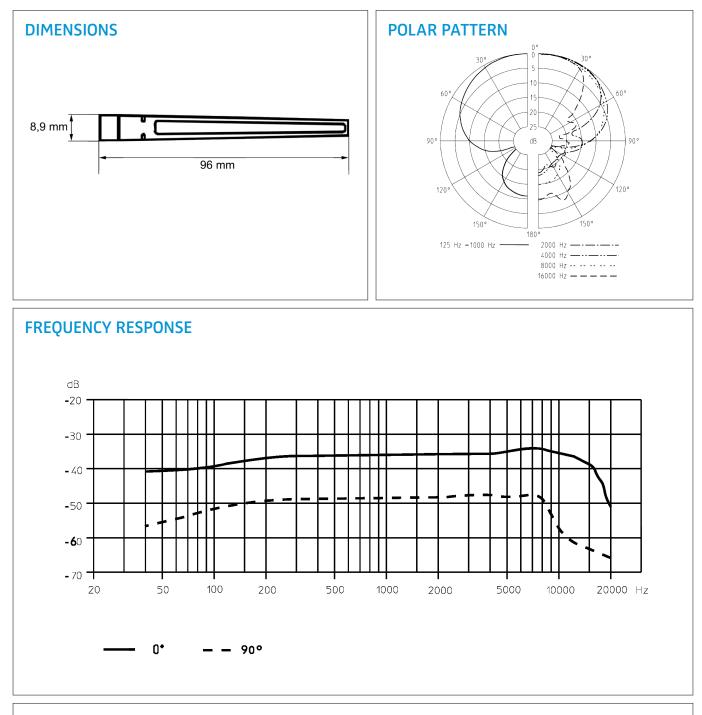

## **PRODUCT VARIANTS**

ME 36, black ME 36 NX, Nextel grey ME 36 W, white Cat. No. 005065 Cat. No. 500818 Cat. No. 005066

#### **RECOMMENDED ACCESSORIES**

MZH gooseneck series: MZH 3015, MZH 3040, MZH 3042, MZH 3062, MZH 3072

🚺 SENNHEISER